


FABRIC ASSEMBLY REMOVE FROM HOUSING AND REPLACE

Step by Step Instructions

continued

Step 11 Reinstall fabric retainers

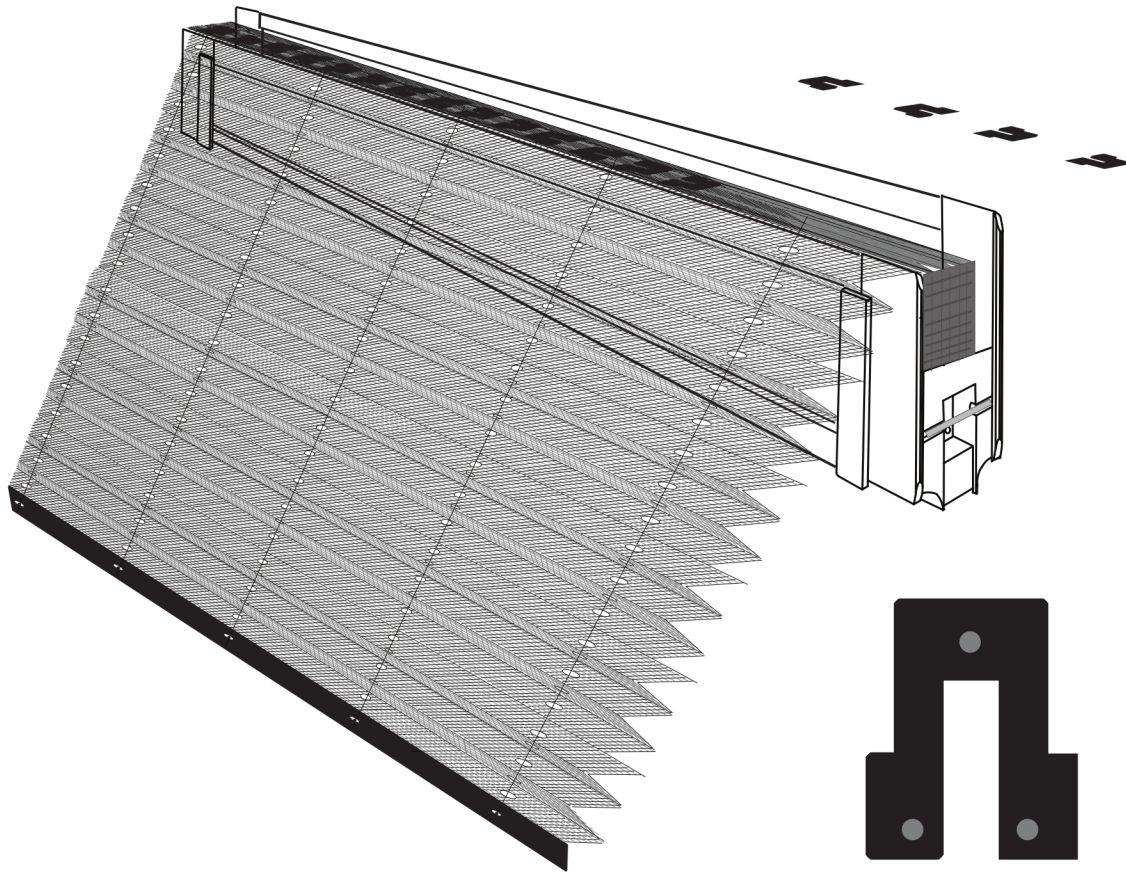

Starting from the screen board count and pull out the number of pleats you noted earlier.

Install 4 fabric retainers between each set of lines. With the round marks facing away from you, push the retainers into the fold between the pleats first and then push into the grooves on the inside of the housing. Seat the retainer as far down and as tightly against the remaining pleats as possible.

