


REPLACING TENSION LINES

These instructions are for replacing the tension lines in a fabric assembly.

With the fabric assembly laid out on a work table with the top to your right remove old tension lines. Note that on units with five lines the lines thru the two top holes go toward the bottom (left) and the lines thru the bottom three holes go toward the top (right). On units with six lines there will be three going toward the top and three going toward the bottom.


Starting at either the top or the bottom replace all the lines as shown.

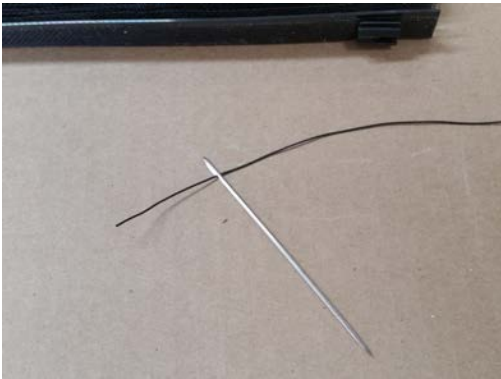

Thread the line thru the needle.



Push the needle thru the fabric.

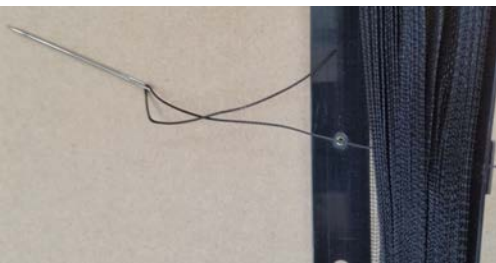


Pull the line thru the fabric.



Thread the line thru the hole in the screen board



Fold the line about 2 inches from the end.

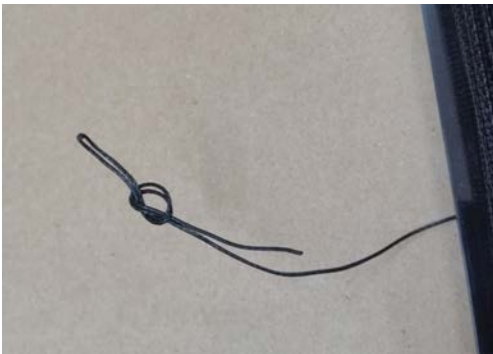

Tie a knot in the doubled end of the line



Cut off excess line past knot.



Repeat with the remainder of the lines.



Pull each of the new lines thru the fabric until knot is pulled against the screen board



Pull the lines into the slots in the eyelets.



Combine all of the lines going toward the top and bottom together into the slots in the eyelets.



Keeping the fabric assembly straight and flat pull all of slack out of each set (top and bottom) of lines and tie a knot near the end of each set.

Note that it is critically important that the length of all the lines in each set are the same length up to the knot with all of the slack out of all of the lines and the fabric assembly straight and flat.